




SUPERKÜL - KEBONY® WOOD
SOLID - SKU #CH-750318




VETTE - KEBONY® WOOD
SOLID - SKU #CH-750332

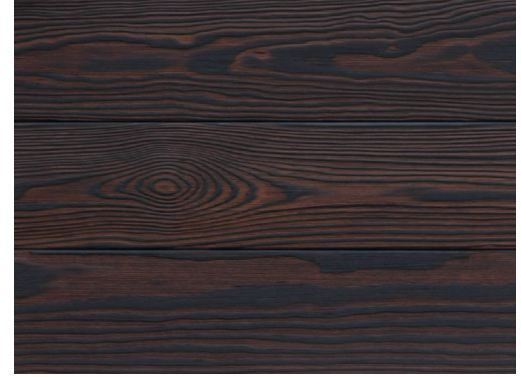

NOBU - KEBONY® WOOD
SOLID - SKU #CH-750257



MARKA - KEBONY® WOOD
SOLID - SKU #CH-750316

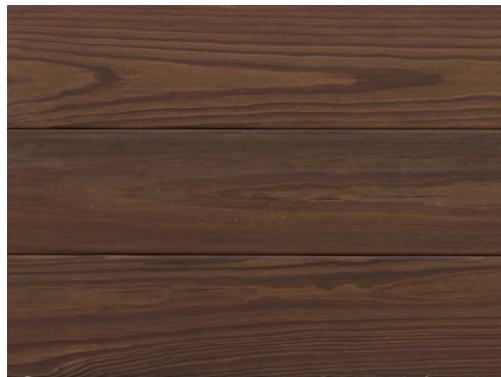

RUSS - KEBONY® WOOD
SOLID - SKU #CH-750317



FAEN - KEBONY® WOOD
SOLID - SKU #CH-750314

Kebony® is a beautiful wood recommended by leading architects. It is sustainable, durable and requires no maintenance beyond normal cleaning. Kebony's performance has been proven in a variety of applications including decking and cladding.

Developed in Norway, the Kebony® technology is an environmentally friendly, patented process, which enhances the properties of sustainable softwood with a bio-based liquid. The process permanently modifies the wood cell walls giving Kebony premium hardwood characteristics and a rich brown color. After exposure to sun and rain the wood develops a natural silver-gray patina..

The Kebony® technology permanently transforms sustainable wood species such as pine into Kebony wood with features that are comparable, and in some cases superior, to those of precious tropical hardwoods. This unique environmentally friendly process is also a superior alternative to traditional wood treatment based on impregnation with biocides (wood preservatives). The company's patent-protected production processes yield products that deliver major improvements in durability and dimensional stability, at the same time as being highly attractive. The Kebony products are suitable for a multitude of applications and designs – encompassing both indoor and outdoor applications.

KEBONY®

Class Rating*: B (ASTM E 84)

Flame Spread Index*: 65 (ASTM E 84)

Smoke Developed Index*: 300 (ASTM E 84)

NOTE: ALL DESIGNS ARE AVAILABLE FIRE TREATED TO CLASS A FOR INTERIOR APPLICATIONS



EXCELLENT STABILITY

swelling and shrinkage reduced by 40-60%



GUARANTEED LONG LIFE

outdoor life time warranty for 30 years



REAL WOOD

with enhanced and strengthened cell structure




HIGH RESISTANCE

against fungi, rot and other wood destroying micro-organisms

STANDARD DIMENSIONS & MILLING:

- 7/8" thick X 5-5/8" wide X 8-16' random lengths - S4S

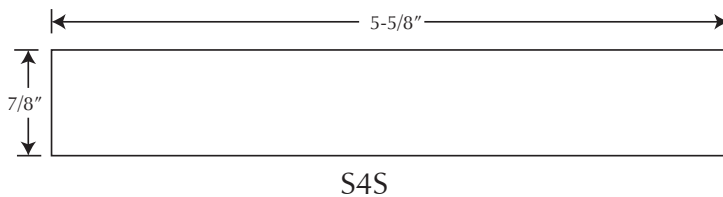

NOTE: Custom width, lengths and millings available.

APPLICATIONS:

- EXTERIOR siding (note: for exterior applications we recommend sealing all four sides)
- DECKING - (MARKA & RUSS)

FINISH SPECS:

- EXTERIOR Burned, Brushed, and Sealed on FACE & BACK
- DECKING Unfinished

INSTALL GUIDELINES:

- Rear ventilation and weather acclimatization are vital to minimize swelling & shrinking
- EXTERIOR: Contact reSAWN for Install Instructions
- DECKING: Refer to Kebony Decking Guidelines: http://resawntimber.wpengine.netdna-cdn.com/wp-content/uploads/2017/05/kebono_us_decking_installation_instructions.pdf

GRADES

- SELECT (Highest quality - mostly clean, small knots allowed)
- See reSAWN's CHARRED usage guide for additional details

POSSIBLE LEED CREDITS

- MR 1 - Building Life-Cycle Impact Reduction

PACKAGING AND FREIGHT:

- All shipments are carefully packaged on 16' pallets (Not boxed or bundled)

** Class Rating, Flame Spread Index and Smoke Developed Index per 3rd party testing from the Wood Database. Contact reSAWN for more information.

* Janka Rating from similarly tested products - expected to be close to actual measurements of reSAWN TIMBER co.'s CHARRED™ products

*All data provided by 3rd party testing that can be found on Kebony's product data sheet based on non-CHARRED Kebony products.